



## Type SCA41

- Shaft Encoder -  $\varnothing$  41 mm
- Shaft:  $\varnothing$  6 mm or  $\varnothing$  1/4 inch
- Resolution up to 7500 ppr
- IP 64 (IP 50 for IDC connector option)

### Electrical Specifications

<b>Code:</b>	Incremental
<b>Resolution:</b>	1 to 7500 ppr (pulses per revolution)
<b>Supply Voltage:</b>	4,5 Vdc min. to 30 Vdc max. (35 mA max. - no load) **
<b>Output Voltage:</b>	Low: 500 mV max. at 10 mA High: ( $V_{in} - 0,6$ ) at -10 mA ( $V_{in} - 1,3$ ) at -25 mA
<b>Output Current:</b>	25 mA max. load per output channel **
<b>Frequency Response:</b>	200 kHz max. **
<b>Output Format:</b>	Two channel (A, B) quadrature with Index (Z) and optional complementary (A-, B-, Z-) outputs
<b>Phase Sense:</b>	A leads B clockwise (CW) from the mounting end of the encoder
<b>Index:</b>	Gated with Channels A and B high
<b>Accuracy:</b>	+/- 0,8 arc-min.
<b>Outputs:</b>	ASIC Push pull and Differential OL7272 Push-pull and Differential Line Driver 26C31 Differential Line Driver 5V output (with 5V input)
<b>Electrical Protection:</b>	Reverse polarity and output short circuit protected
<b>Noise Immunity:</b>	Tested to EN61000-6-2 : 2005 (industrial environments) Electromagnetic compatibility (EMC) and EN 61000-6-3 : 2007 (residential, commercial, and light-industrial environments) for Electromagnetic compatibility (EMC)

\*\*= It is recommended user not to combine max. Value for all 3 parameters

### Mechanical Specifications

<b>Material:</b>	Housing: Aluminum Cap: Electroplated Steel Aluminum (flat cable option) Shaft: Stainless Steel
<b>Weight:</b>	Encoder: ~ 50 gr (1,76 oz) Cable: 50 gr / meter (1,76 oz / meter)
<b>Bearing Life:</b>	> $1,9 \times 10^{10}$ revolutions at rated load
<b>Shaft Speed:</b>	12.000 rpm (max.)
<b>Starting Torque:</b>	< 0,005 Nm (0,708 oz-in) at 25° C
<b>Mass Moment of Inertia:</b>	1,0 gcm <sup>2</sup> ( $1,42 \times 10^{-5}$ oz-in-sec <sup>2</sup> )
<b>Shaft Loads:</b>	Axial: 20 N (4,50 lbs) max. Radial: 20 N (4,50 lbs) max.


### Environmental Specifications

<b>Operating Temp.:</b>	-40° to +85° C
<b>Storage Temp.:</b>	-40° to +85° C
<b>Shock:</b>	100 G / 11 ms
<b>Vibration:</b>	10-2000 Hz / 10 G
<b>Bump:</b>	10 G / 16 ms (1000 x 3 axis)
<b>Humidity:</b>	98 % RH without condensation
<b>Enclosure Rating:</b>	IP 64 / Nema 4 (approx.) IP 50 / Nema 5 (approx.) - flat cable

### Connection Options

<b>Cable:</b>	8 leads (0,05 mm <sup>2</sup> , 30 AWG) - Differential 5 leads (0,14 mm <sup>2</sup> , 26 AWG) - Standard twisted pairs; shielded
<b>Flat Cable:</b>	10 lead flat cable with IDC connector

## Output waveform

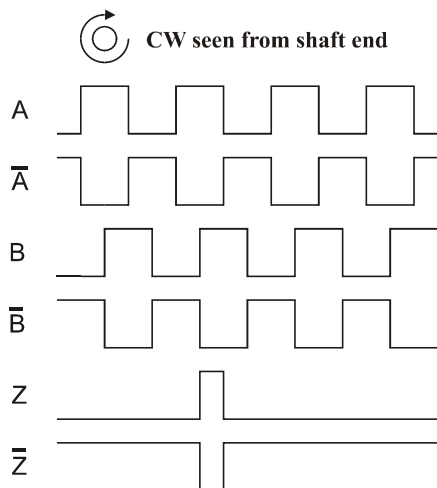

Channel tolerance             $180\text{ e}^\circ \pm 36\text{ e}^\circ$   
 Phase difference tolerance    $90\text{ e}^\circ \pm 18\text{ e}^\circ$   
 Z channel tolerance            $90\text{ e}^\circ \pm 18\text{ e}^\circ$

## Disk Resolutions (pulses per revolution)



1	36	150	512	2500
4	50	180	600	3000
10	60	200	1000	3600
11	64	250	1024	5000
12	75	256	1250	7500*
15	90	300	1800	
20	100	360	2000	
25	125	400	2500	
30	128	500	2048	

### Other options on request

Pulses per revolution,  
 min. 1 – max. 7.500



\* Operating temperature:  $-20^\circ\text{C}$  to  $50^\circ\text{C}$

## Mechanical Dimensions

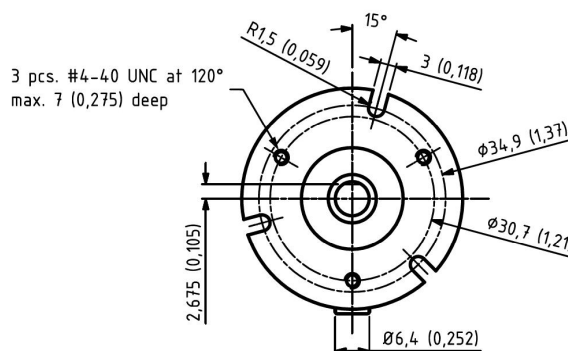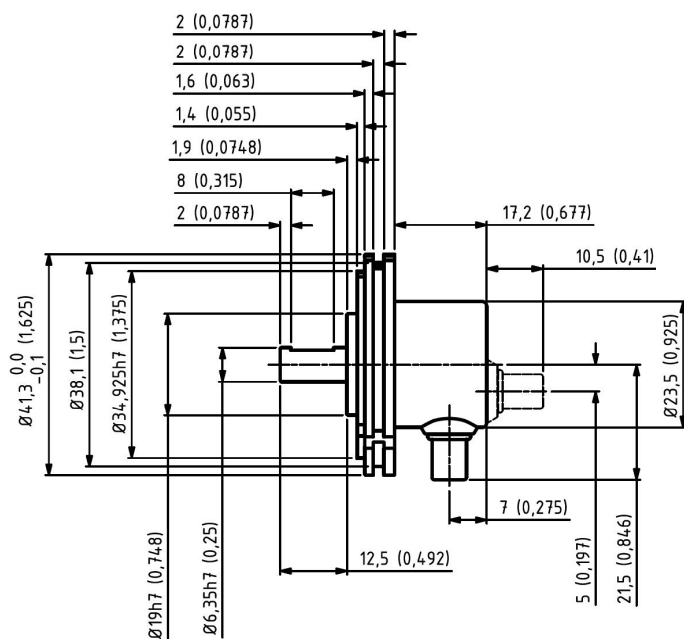



Standard Cable Gland  
 Side (S) or Back (B)

mm (inches)

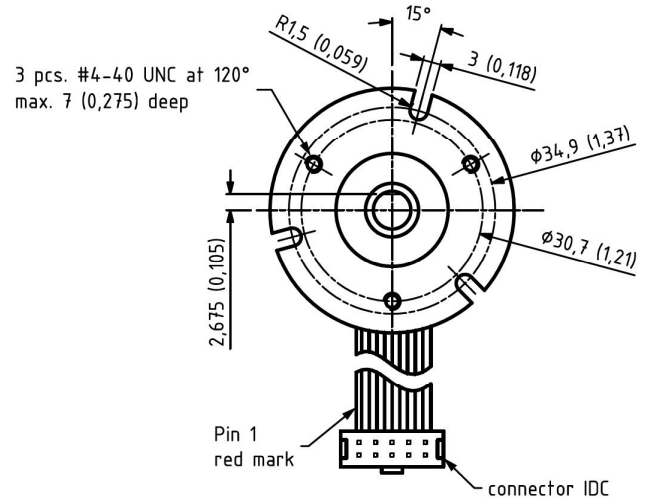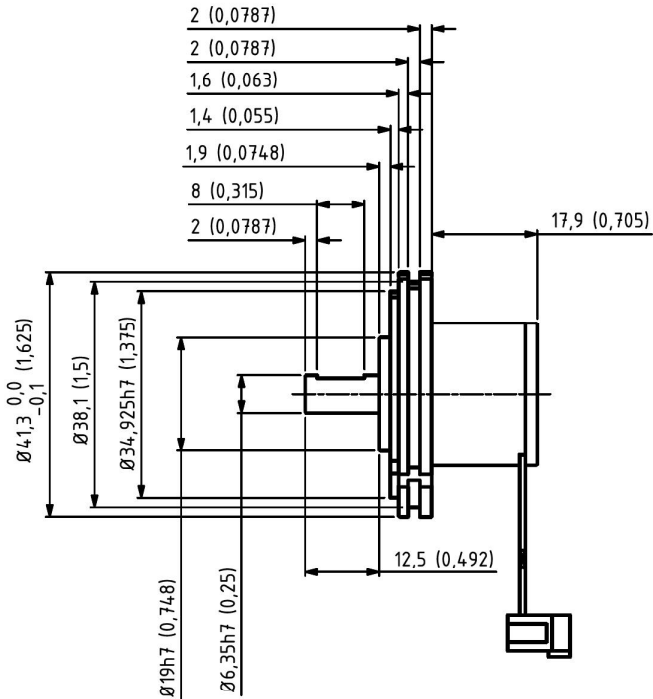

Flat Ribbon Cable with IDC connector

mm (inches)

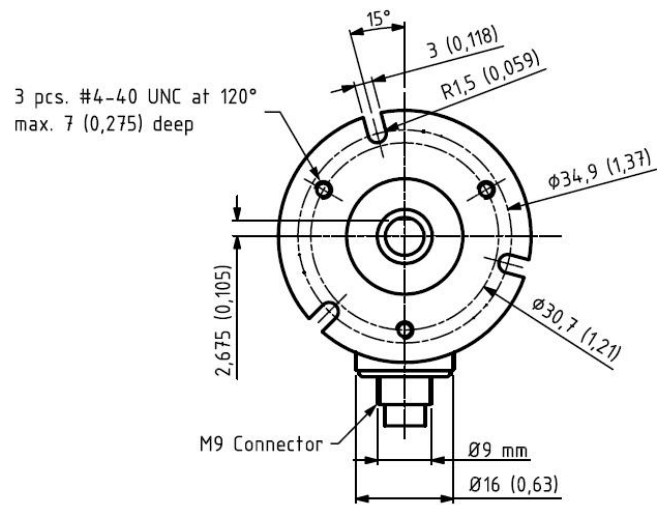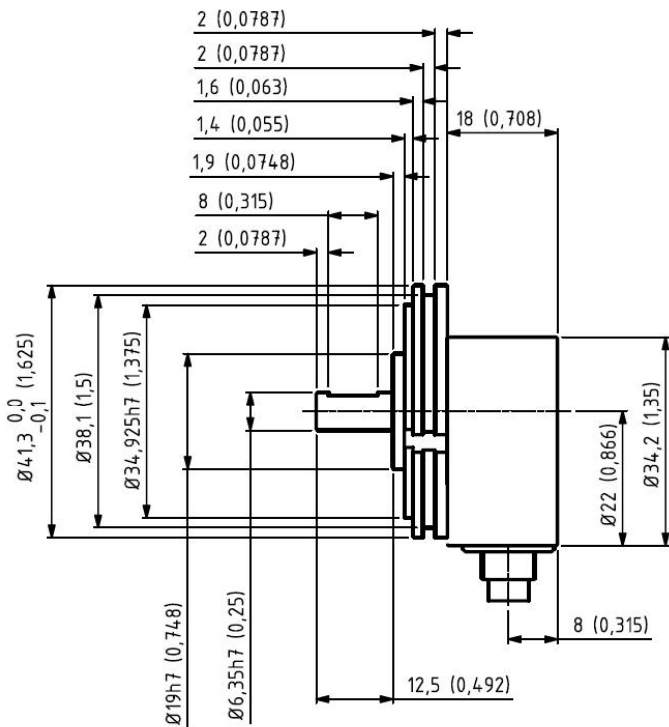

M9 Connector

mm (inches)


## Output Terminations

Channel	Standard Cable	
	Standard Output	Differential Output
Channel	Wire Color	
A	Green	Pink
A -	NC	Gray
B	Yellow	Green
B -	NC	Yellow
Z	Gray	White
Z -	NC	Brown
Vsup	Brown	Red
GND	White	Blue

GND = Circuit Ground


Position	Flat Cable w/ IDC Connector	
	Differential Output *	
Position	Channel	
1	NC	
2	Vsup	
3	GND	
4	NC	
5	A	
6	A -	
7	B	
8	B -	
9	Z -	
10	Z	

\* Hewlett Packard (HP) compatible

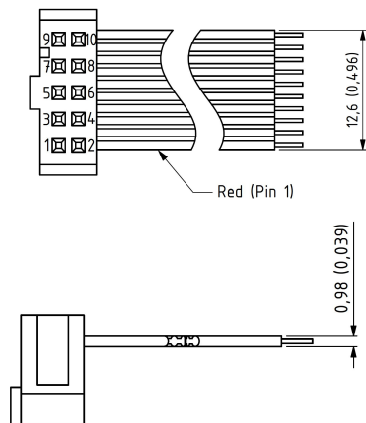

mm (inches)

- IP 50 rating
- CE mark not available
- 0,5 m, 1 m, or 2 m cable length only

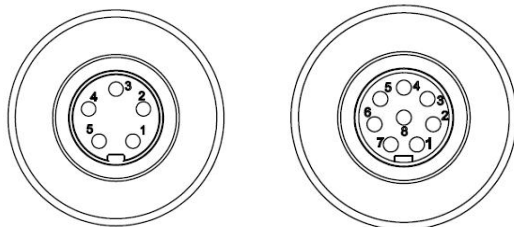

Position	M9 5 - pin	M9 8 - pin
	Standard Output	Differential Output
	Channel	Channel
1	VDD	VDD
2	GND	GND
3	A	A
4	B	A -
5	Z	B
6		B -
7		Z
8		Z -

## Ordering Code

Example: SCA41 – 1024 – D – 06 – 12 – 64 – 01 – B

### Type

<b>SCA41</b>								
	<b>Pulses per Revolution</b>	<b>Output</b>	<b>Shaft Dia.</b>	<b>Shaft Length</b>	<b>IP Rating</b>	<b>Cable Length</b>	<b>Cable Takeout</b>	<b>Connector</b>
	See table				IP 64 <b>64</b> IP 50 <b>50</b>			
		Standard <b>N</b> Standard – Open Collector NPN <b>NON</b> Standard – Open Collector PNP <b>PNP</b> Differential <b>D</b> 26C31 Line Driver 5V only <b>L</b> OL 7272 Line Driver <b>M</b> Standard - with built-in TSM ** <b>T</b>				<u>Standard Cable</u> Standard is 1 meter <b>01</b> Specify length <b>XX</b> <u>Flat Cable w/ IDC</u> 0,5 meter <b>0,5</b> 1,0 meter <b>01</b> 2,0 meters <b>02</b>		No connector <b>00</b> M9 5-pin <b>P5</b> M9 8-pin <b>P8</b> IDC* <b>IDC</b>
					*=Only IP 50			* = Only Flat Cable
			6.0 mm x 10 mm <b>06 - 10</b> 6.0 mm x 12,5 mm <b>06 - 12</b> 6.0 mm x 14 mm <b>06 - 14</b> 1/4 inch x 12,5 mm <b>1/4 - 12</b>				Side (radial) <b>S</b> Back (axial) <b>B</b> Flat cable w/ IDC connector <b>SF</b>	

\*\* = Designed specifically for Wind Power applications.

See SCA24 COC under *Industries – Wind Power – SCA24* for additional conformity standards testing.

TSM = Transient Suppression Module

Available only as Standard output

**Other options on request:**  
Please contact Scancon A/S

**See Accessories for drawings**